


# COMPACT ENCLOSURE Installation Instructions




**CAUTION:** Improper installation, operation or servicing will result in equipment damage or poor product performance. This product should be installed & serviced by qualified technical personnel who are familiar with construction, "operation" & potential hazards of this type of connection.

- Over tightening may cause product to distort and/or bind & can cause lid of Compact Enclosure not to close & lock properly.
- Over tightening of any connections may result in damage.
- Do not use countersink headed screws due to cracking potential.
- Failure to follow these instructions for installation of our product will forfeit any warranty consideration.


1. Cut a 1 $\frac{3}{4}$ " hole in sidewall and feed appropriate connections through opening.

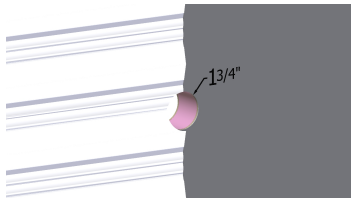

2. Apply putty tape or foam gasket to back of Compact Enclosure covering pre-drilled mounting holes.

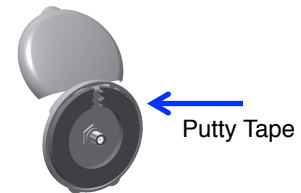

3. Connect any electrical or coax cable(s) to back of Compact Enclosure fittings.

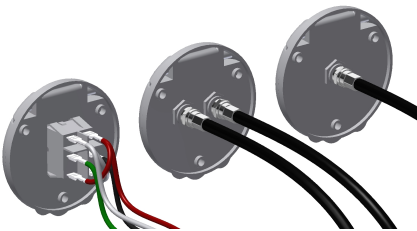

4. With Compact Enclosure lid open, position Compact Enclosure into cutout opening & secure to sidewall with (3) #8 self-tapping screws.



(Compact Enclosure is designed to have hinged door open vertically.)

5. Open & close Compact Enclosure door a few times to ensure proper functioning.

\*If Compact Enclosure does not close & lock properly, mounting screws may be too tight.

6. Cap seal outside perimeter of Compact Enclosure for waterproofing.



58471 Fir Road, Mishawaka, IN 46544  
Phone: (574) 259-7838 Fax: (574) 259-7939  
[www.bandbmolders.com](http://www.bandbmolders.com)